

INTEGRAL TOTALLY ENCLOSED TOP MOUNTED MID / HIGHBAY LUMINAIRE

APPLICATIONS


- Steel plants
- Thermal power stations
- Warehouses
- Industries
- Fertilizer plants
- Aircraft hangers

CONSTRUCTION

- Vertical cast aluminium corrosion resistant housing accommodating adjustable lamp holder, heat resistant & toughened glass cover held by stainless steel toggles with synthetic rubber gasket & chain with copper wound ballast, PF correction capacitor and electronic ignitor (for SV/MH version only) are prewired upto terminal block.
- Epoxy powder coated painting.
- M. S. eyebolt for mounting.
- Lamp holder base GES(E-40), skirted porcelain.

REFLECTOR

- Electrochemically brightened and high purity anodised aluminium reflector provides efficient light distribution.

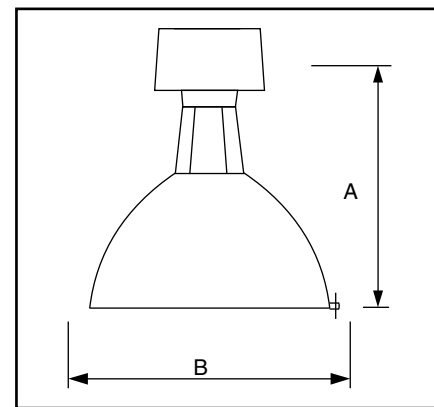

ELECTRICAL DATA & DIMENSIONS

IP - 55

Cat. Ref.	Lamp			Nominal or Rated Voltage (V)	Mains current (A)	Dimensions (mm)		App. Wt (Kgs)	Std. Pkg. (Nos.)
	Type	No.	Wattage			A	B (∅)		
VMH-A-01-TE-250	HPMV	1	250	220/240	1.35	635	425	7.4	12
VMH-A-01-TE-400	HPMV	1	400	220/240	2.15	600	490	9.4	12
VSH-A-01-TE-150	HPSV	1	150	220/240	0.85	635	425	7.5	12
VSH-A-01-TE-250	HPSV	1	250	220/240	1.40	635	425	8.45	12
VSH-A-01-TE-400	HPSV	1	400	220/240	2.25	600	490	11.2	12
VMHH-A-01-TE-250	MH	1	250	220/240	1.38	635	425	8.5	12
VMHH-A-01-TE-400	MH	1	400	220/240	2.20	635	490	11.2	12
VMMHH-A-01-TE-250	MH	1	250	220/240	1.35	635	425	7.4	12
VMMHH-A-01-TE-400	MH	1	400	220/240	2.15	600	490	9.4	12

Weight for installation purpose only, Dimensional Tolerance ± 1.5% All data subject to change without notice

Sales Office :- C-33, East of Kailash, New Delhi-110065, Tel.: 011-26842693 Fax : 91-11-26842693

Photometric Centre:- 142 A/1, NSEZ, NOIDA

Works :- 136, Industrial Area, Malanpur, (Ghirongi) Distt. Bhind, (MP)