

## NON INTEGRAL TOTALLY ENCLOSED MID/HIGHBAY LUMINAIRE

### APPLICATIONS


- Steel plants
- Thermal power station
- Warehouses
- Industries
- Fertilizer plants
- Aircraft hangers

### CONSTRUCTION

- Vertical cast aluminum corrosion resistant housing.
- Toughened glass cover held by stainless steel toggles with synthetic rubber gasket & chain.
- Epoxy powder coated painting.
- M. S. eyebolt for mounting.
- Lamp holder base GES(E-40), skirted porcelain.

### REFLECTOR

- Electrochemically brightened and high purity anodised aluminum reflector provides efficient light distribution.

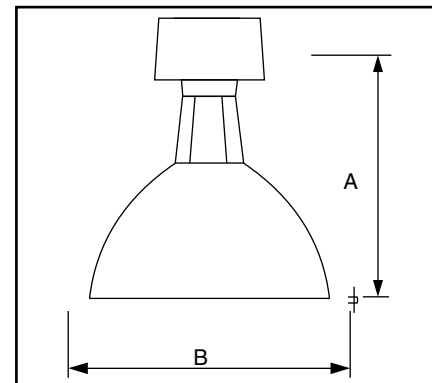

### ELECTRICAL DATA & DIMENSIONS

| Cat. Ref.   | Lamp |     |         | Nominal or Rated Voltage (V) | Mains current (A) | Dimensions (mm) |     | App. Wt (Kgs) | Std. Pkg. (Nos.) |
|-------------|------|-----|---------|------------------------------|-------------------|-----------------|-----|---------------|------------------|
|             | Type | No. | Wattage |                              |                   | A               | B   |               |                  |
| VHB-A-TE-NI | HPMV | 1   | 250     | 220/240                      | 1.35              | 550             | 425 | 3.350         | 12               |
| VHB-A-TE-NI | HPMV | 1   | 400     | 220/240                      | 2.15              | 515             | 490 | 4.150         | 12               |
| VHB-A-TE-NI | HPSV | 1   | 150     | 220/240                      | 0.85              | 550             | 425 | 3.350         | 12               |
| VHB-A-TE-NI | HPSV | 1   | 250     | 220/240                      | 1.40              | 550             | 425 | 3.350         | 12               |
| VHB-A-TE-NI | HPSV | 1   | 400     | 220/240                      | 2.25              | 515             | 490 | 4.150         | 12               |
| VHB-A-TE-NI | MH   | 1   | 250     | 220/240                      | 1.38              | 550             | 425 | 3.350         | 12               |
| VHB-A-TE-NI | MH   | 1   | 400     | 220/240                      | 2.20              | 515             | 490 | 4.150         | 12               |

\*When used with appropriate wattage CG Box.

Weight for installation purpose only, Dimensional Tolerance  $\pm 1.5\%$  All data subject to change without notice

**Sales Office :-** C-33, East of Kailash, New Delhi-110065, Tel.: 011-26842693 Fax : 91-11-26842693

**Photometric Centre:-** 142 A/1, NSEZ, NOIDA

**Works :-** 136, Industrial Area, Malanpur, (Ghirongi) Distt. Bhind, (MP)